
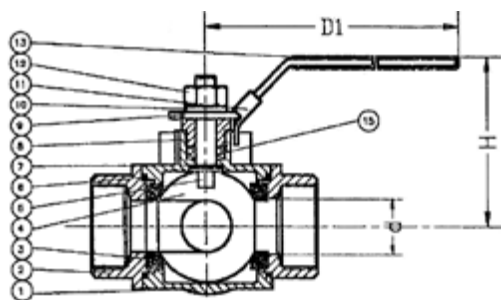



MODEL: **BV-3ASL** (L-PORT)
BV-3AST (T-PORT)

- The available THREAD: ANSI B2.1, BS21 or DIN-259.
- Reduce Bore / Locking Device.
- Without Mounting Pad.
- 1000 PSI W.O.G.

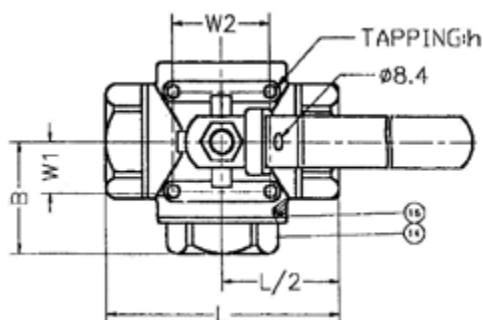

Material

Model	BV-3ASL / BV-3AST
1 Body	CF8M
2 End Cap	CF8M
3 Seat	PTFE
4 Ball	CF8M
5 Stem	S/S 316
6 Gasket	PTFE
7 Thrust Washer	PTFE
8 Gland	S/S 316
9 Handle	S/S 304
10 Handle Washer	S/S 304
11 Locking Plate	S/S 304
12 Handle Nut	S/S 304
13 Handle Sleeve	VINYL GRIP
14 Cap	CF8M
15 Stem Packing	PTFE
16 Gasket	PTFE

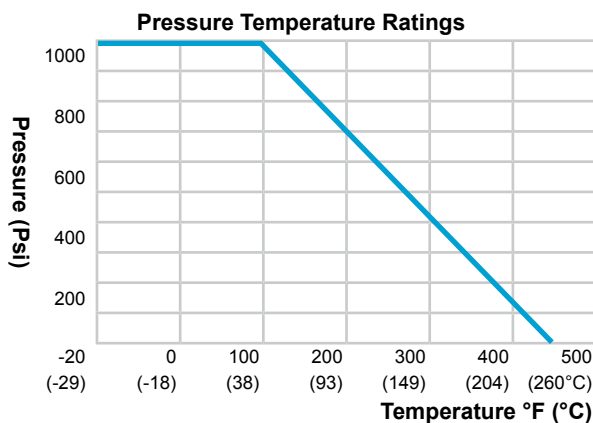

Dimension

mm

Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
d		11.0	11.0	12.7	16.0	20.0	25.0	32.0	38.1
L		69.4	69.4	76	86.6	102	118	126	149
H		61	61	65.5	71	76	81.5	102	112
D1		106	106	138	138	157	157	222	222
B		35	35	37	45	51	58	63	77
W1		13	13	13	21	21	24	24	24
W2		28.5	28.5	28.5	34.6	34.6	38	38	38
h		10-24 UNC	10-24 UNC	10-24 UNC	10-24 UNC	10-24 UNC	1/4-20 UNC	1/4-20 UNC	1/4-20 UNC