
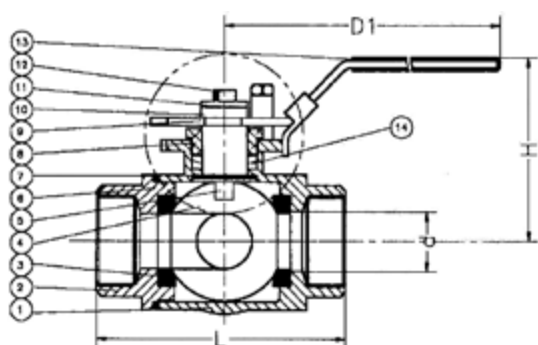



MODEL: BV-3CSL (L-PORT)

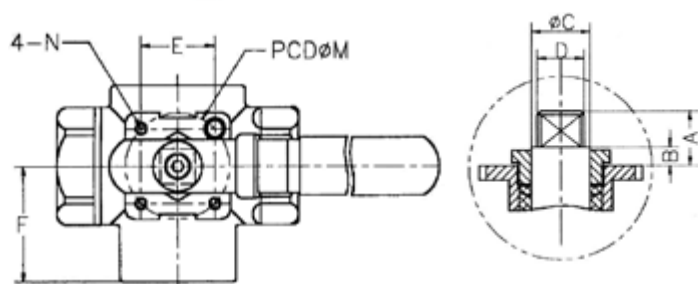

- The available THREAD: ANSI B2.1, BS21 or DIN-259.
- Reduce Bort / Locking Device.
- With ISO 5211 Mounting Pad.
- 1000 PSI W.O.G.

Material

Model	BV-3CSL
1 Body	CF8M
2 Cap	CF8M
3 Seat	PTFE
4 Ball	CF8M
5 Stem	S/S 316
6 End Seals	PTFE
7 Thrust Washer	PTFE
8 Gland	S/S 304
9 Handle	S/S 304
10 Handle Washer	S/S 304
11 Washer	S/S 304
12 Handle Nut	S/S 304
13 Handle Sleeve	VINYL GRIP
14 Stem Packing	PTFE

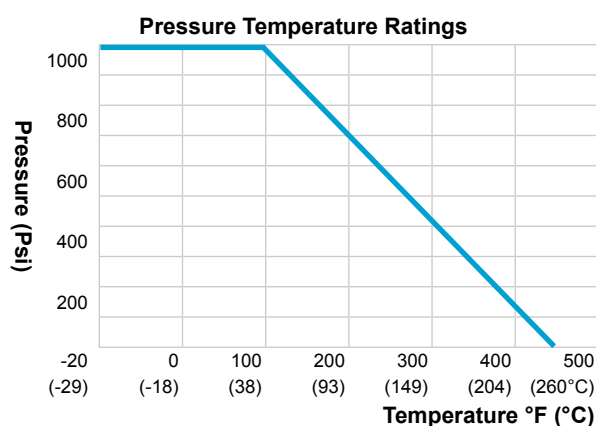

Dimension

		mm							
Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
d		11.0	11.0	12.5	16.0	20.0	25.4	31.8	38.1
L		57.2	57.2	66	77	88	103	111	136
H		62.7	62.7	64.7	67.7	71.2	88.7	93.7	98.2
D1		133	133	133	133	133	178.5	178.5	178.5
A		11	11	11	11	11	23.5	23.5	23.5
B		6	6	6	6	6	8	8	8
C		12	12	12	12	12	15	15	15
D		9	9	9	9	9	11	11	14
E		25	25	25	25	29	35.5	35.5	35.5
F		29	29	33.5	38.7	46	51.7	61	71.4
M		36	36	36	36	42	50	50	50
N		M5 x 0.8	M5 x 0.8	M5 x 0.8	M5 x 0.8	M5 x 0.8	M6 x 1.0	M6 x 1.0	M6 x 1.0